

| | | | |
|-----------------------|------------------------|-----------------------------|---|
| NDB TII 269 | APP CRS 250° | Rwy Idg TDZE Apt Elev | 4000 785 786 |
|-----------------------|------------------------|-----------------------------|---|

NDB RWY 24


SENECA COUNTY (16G)

▽ Rwy 24 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Findlay altimeter setting and increase all MDAs 60 feet, increase S-24 Cat C visibility 1/8 SM, and Circling Cat D visibility 1/4 SM. Straight-in Rwy 24 NA at night, Circling Rwy 24 NA at night.



△NA

MISSED APPROACH: Climb to 2400 then right turn direct TII NDB and hold.

| | | | |
|--------------------------|---------------------------|---------------------------------------|--|
| AWOS-3 127.175 | FDY ASOS 132.85 | TOLEDO APP CON 120.8 317.55 | UNICOM 123.0 (CTAF) ① |
|--------------------------|---------------------------|---------------------------------------|--|

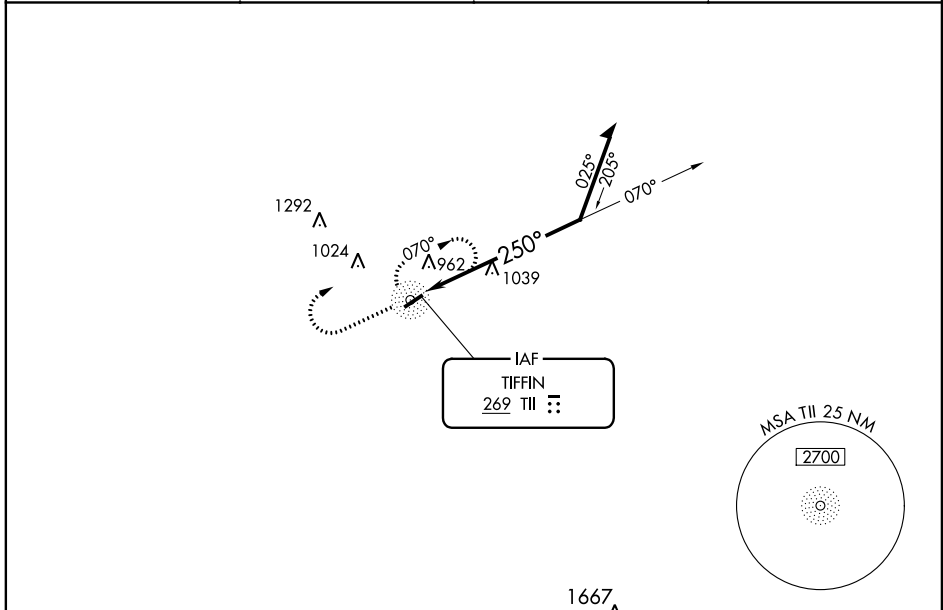

| | | | |
|------|-----|------|-----|
| ELEV | 786 | TDZE | 785 |
|------|-----|------|-----|

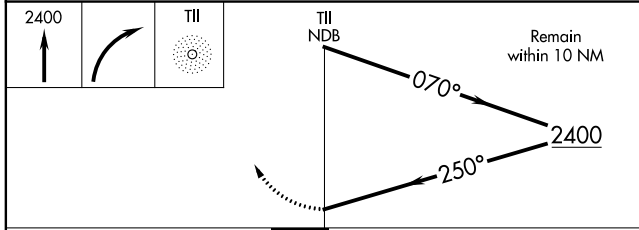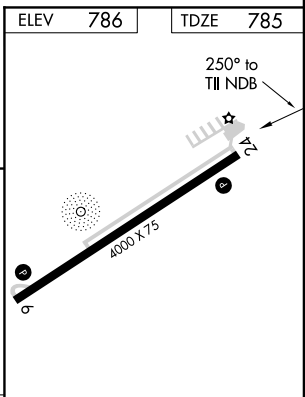

| CATEGORY | A | B | C | D |
|----------|--------|-------------|-------------------------------|-------------------------------|
| S-24 | 1460-1 | 675 (700-1) | 1460-1 7/8 675 (700-1 7/8) | 1460-2 675 (700-2) |
| CIRCLING | 1460-1 | 674 (700-1) | 1460-2 674 (700-2) | 1560-2 1/2 774 (800-2 1/2) |

MIRL Rwy 6-24 **①**
REIL Rwys 6 and 24 **①**

EC-2, 11 AUG 2022 to 08 SEP 2022

EC-2, 11 AUG 2022 to 08 SEP 2022

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 90528 W24A | APP CRS 242° | Rwy Idg TDZE Apt Elev | 4000 785 786 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 24


SENECA COUNTY(16G)

RNP APCH.



NA Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. Rwy 24 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, and increase LPV, LNAV/VNAV all Cats visibility $\frac{1}{8}$ SM, increase LNAV and Circling Cat C visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 2400 direct MAZKY and hold.

| | | | |
|--------------------------|---------------------------|---------------------------------------|-------------------------------|
| AWOS-3 127.175 | FDY ASOS 132.85 | TOLEDO APP CON 120.8 317.55 | UNICOM 123.0 (CTAF) |
|--------------------------|---------------------------|---------------------------------------|-------------------------------|

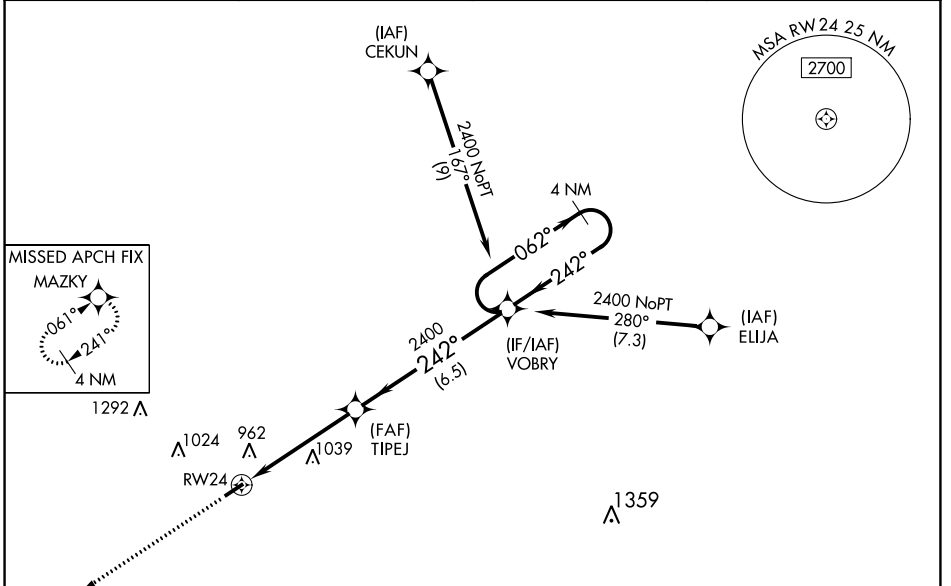

| | | | |
|------|-----|------|-----|
| ELEV | 786 | TDZE | 785 |
|------|-----|------|-----|

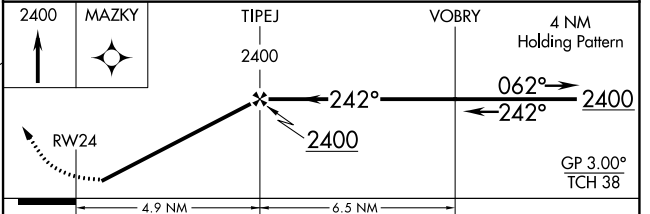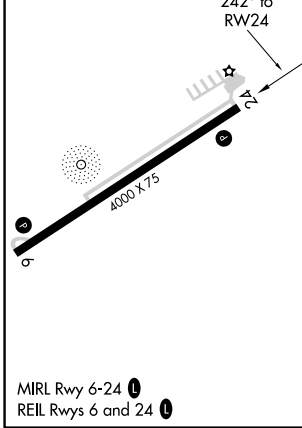

| CATEGORY | A | B | C | D |
|--------------|--------|-------------|--|----|
| LPV DA | | 1058-1 | 273 (300-1) | NA |
| LNAV/VNAV DA | | 1063-1 | 278 (300-1) | NA |
| LNAV MDA | 1280-1 | 495 (500-1) | 1280-1 $\frac{3}{8}$ 495 (500-1 $\frac{3}{8}$) | NA |
| CIRCLING | 1280-1 | 494 (500-1) | 1340-1 $\frac{1}{2}$ 554 (600-1 $\frac{1}{2}$) | NA |

EC-2, 11 AUG 2022 to 08 SEP 2022

EC-2, 11 AUG 2022 to 08 SEP 2022

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 77713 W06A | APP CRS 061° | Rwy Idg TDZE Apt Elev | 4000 786 786 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 6



SENECA COUNTY (16G)

RNP APCH.

▽ Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
△ NA When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats ¼ SM and LNAV and Circling Cat C visibility ¼ SM.


MISSED APPROACH:
Climb to 2400 direct
VOBRY and hold.

| | | | |
|--------------------------|---------------------------|---------------------------------------|-------------------------------|
| AWOS-3 127.175 | FDY ASOS 132.85 | TOLEDO APP CON 120.8 317.55 | UNICOM 123.0 (CTAF) |
|--------------------------|---------------------------|---------------------------------------|-------------------------------|

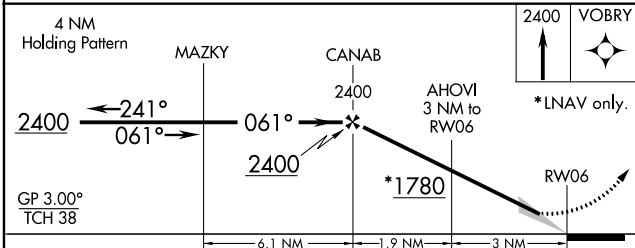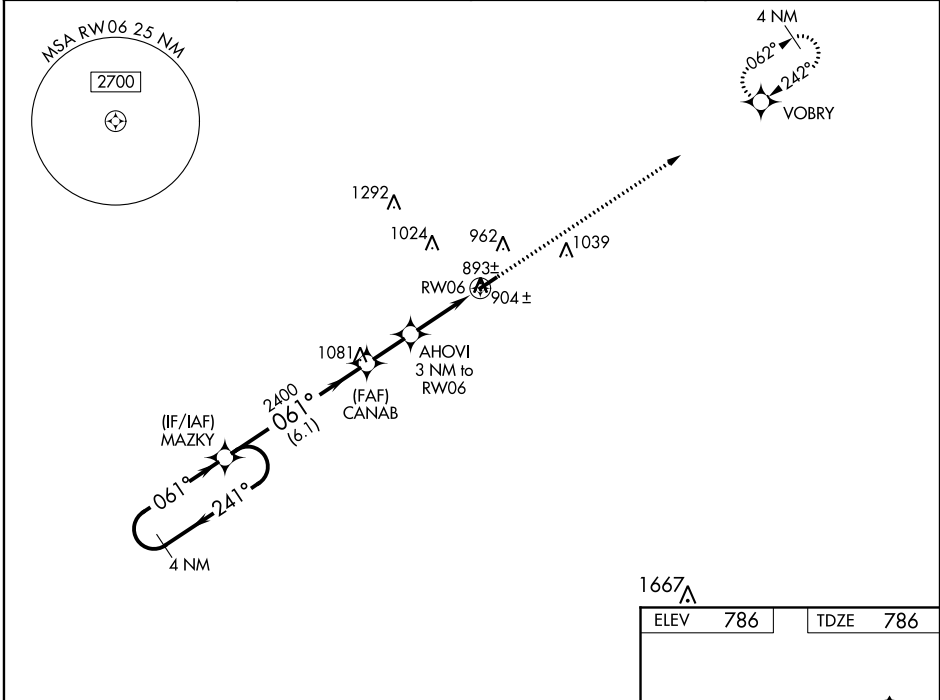

| | | | |
|------|-----|------|-----|
| ELEV | 786 | TDZE | 786 |
|------|-----|------|-----|

| CATEGORY | A | B | C | D |
|--------------|---------|--------------|-------------------------|----|
| LPV DA | 1137-1¼ | 351 (400-1¼) | | NA |
| LNAV/VNAV DA | 1174-1½ | 388 (400-1½) | | NA |
| LNAV MDA | 1160-1 | 374 (400-1) | | NA |
| CIRCLING | 1280-1 | 494 (500-1) | 1340-1½ 554 (600-1½) | NA |

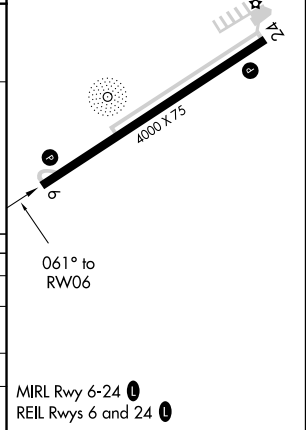

EC-2, 11 AUG 2022 to 08 SEP 2022

EC-2, 11 AUG 2022 to 08 SEP 2022

| | | |
|--|------------------------|---|
| VORTAC FBC 108.2 Chan 19 | APP CRS 073° | Rwy Idg TDZE 786 Apt Elev 786 |
|--|------------------------|---|

VOR RWY 6




SENECA COUNTY (16G)

DME required.

NA Circling to Rwy 24 NA at night. Rwy 6 helicopter reduction below 3/4 SM NA. When local altimeter not received, use Findlay altimeter setting and increase all MDA 60 feet and S-6 Cat C visibility 1/2 SM and Circling Cat C visibility 1/4 SM.

MISSED APPROACH: Climb to 2400 then left turn on FBC VORTAC R-073 to REBUT/FBC 21 DME and hold.

| | | | |
|--------------------------|---------------------------|---------------------------------------|--|
| AWOS-3 127.175 | FDY ASOS 132.85 | TOLEDO APP CON 120.8 317.55 | UNICOM 123.0 (CTAF) 0 |
|--------------------------|---------------------------|---------------------------------------|--|

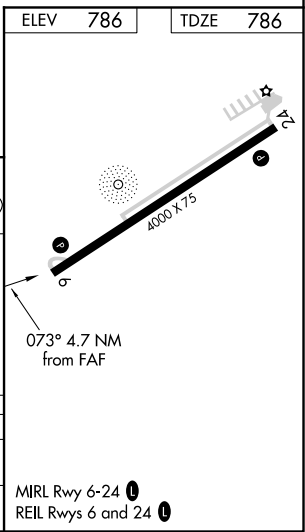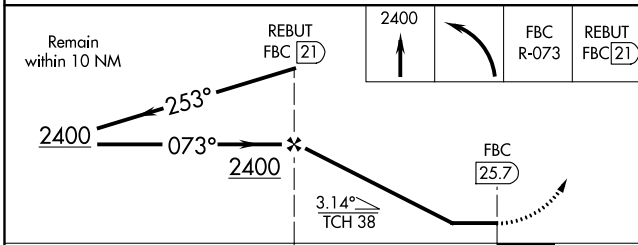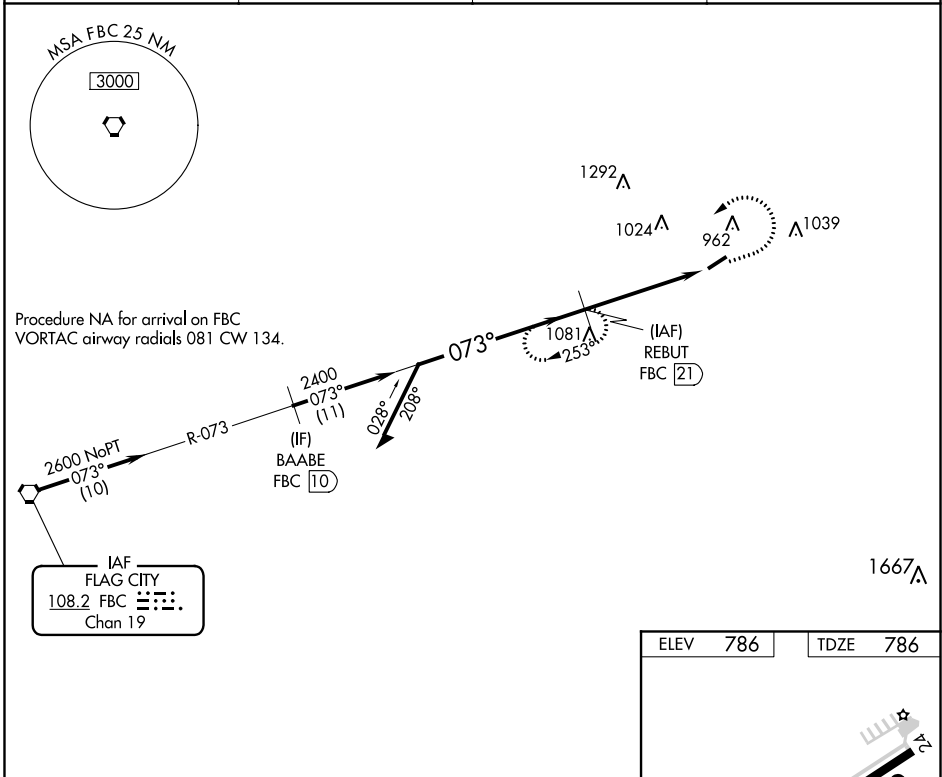

| CATEGORY | A | B | C | D |
|----------|-----------------------|-------------------------------|-------------------------------|----|
| S-6 | 1400-1 | 614 (700-1) | 1400-1 3/4 614 (700-1 3/4) | NA |
| CIRCLING | 1400-1 614 (700-1) | 1400-1 1/4 614 (700-1 1/4) | 1400-1 3/4 614 (700-1 3/4) | NA |

EC-2, 11 AUG 2022 to 08 SEP 2022

EC-2, 11 AUG 2022 to 08 SEP 2022