

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>93608</b><br><b>W03A</b> | APP CRS<br><b>038°</b> | Rwy Idg <b>4314</b><br>TDZE <b>1450</b><br>Apt Elev <b>1470</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 3


DEVILS LAKE RGNL (DVL)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet, and all MDA 80 feet, increase LNAV/VNAV all Cats visibility ½ mile, LNAV and Circling Cat C and D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Cando altimeter setting.

MISSED APPROACH: Climb to 3400 direct ZEVAS and hold.

|                            |                                          |                                 |
|----------------------------|------------------------------------------|---------------------------------|
| AWOS-3PT<br><b>125.875</b> | MINNEAPOLIS CENTER<br><b>124.2 270.3</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|------------------------------------------|---------------------------------|

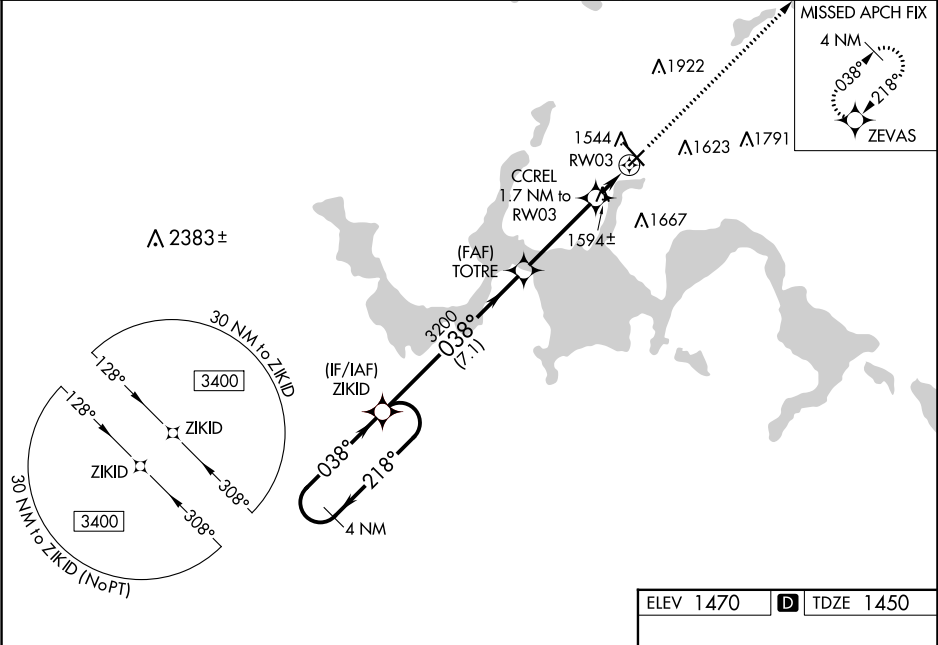

|                                                                  |                    |        |                                           |                      |
|------------------------------------------------------------------|--------------------|--------|-------------------------------------------|----------------------|
| VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25). |                    |        |                                           |                      |
| 4 NM Holding Pattern                                             |                    | ZIKID  | TOTRE                                     | CCREL 1.7 NM to RW03 |
| 3400 ← 218° / 038° →                                             |                    | 3200   | *2040                                     |                      |
| GP 3.00° TCH 50                                                  |                    | 7.1 NM | 3.6 NM                                    | 1.7 NM               |
| CATEGORY                                                         | A                  | B      | C                                         | D                    |
| LPV DA                                                           | 1700-1             |        | 250 (300-1)                               |                      |
| LNAV/VNAV DA                                                     | 1714-1             |        | 264 (300-1)                               |                      |
| LNAV MDA                                                         | 1860-1 410 (400-1) |        | 1860-1½ 410 (400-1½)                      |                      |
| CIRCLING                                                         | 2000-1 530 (600-1) |        | 2240-2¼ 770 (800-2¼) 2240-2½ 770 (800-2½) |                      |

