

WAAS
CH **99334**
W04A

APP CRS
038°

Rwy Idg
TDZE **1376**
Apt Elev **1379**

RNAV (GPS) RWY 4

EL DORADO/CAPT JACK THOMAS MEML (EQA)

⚠

NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet. Baro-VNAV NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH: Climb to 3100 direct SMALE and hold.

AWOS-3P
120.875

WICHITA APP CON
134.8 269.1

UNICOM
122.8 (CTAF) 0

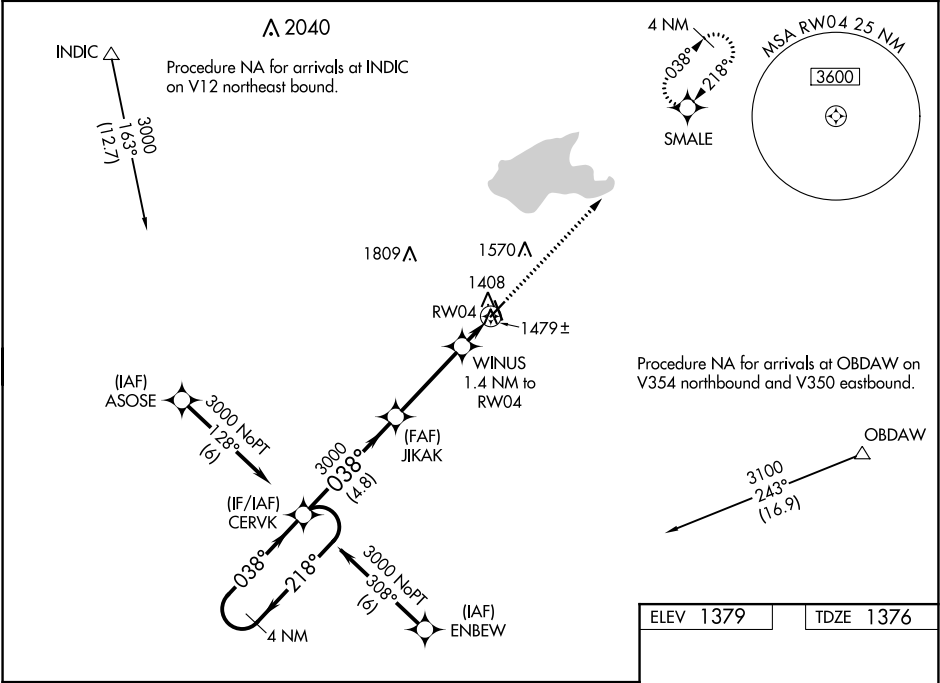

4 NM Holding Pattern
CERVK
3000
←218°
038°→
038°
3000
GP 3.00°
TCH 40

JIKAK
3000
*1860
WINUS
1.4 NM to RW04
RW04
*LNAV only
3100 SMALE
↑
3.6 NM
1.4 NM

CATEGORY

A

B

C

D

LPV DA

1576-1

200 (200-1)

NA

LNAV/VNAV DA

1626-1

250 (300-1)

NA

LNAV MDA

1740-1

364 (400-1)

NA

CIRCLING

1820-1
441 (500-1)

1960-1
581 (600-1)

NA

ELEV 1379

TDZE 1376

51
33
220° X 75
4200 X 75
038° to RW04
HIRL Rwy 4-22 and 15-33 0