


WAAS CH 62943 W27A	APP CRS 268°	Rwy Idg TDZE Apt Elev	4200 4295 4312
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27
WHEATLAND COUNTY AT HARLOWTON (HWQ)

RNP APCH.	MISSED APPROACH: Climb to 9600 direct QOVCA and on track 352° to ZERZO and hold. # Missed approach requires minimum climb of 220 feet per NM to 9200.
NA Circling Rwy 9 NA at night. Baro-VNAV NA. Use Lewistown altimeter setting.	

LWT ASOS 118.375	SALT LAKE CENTER 127.75 351.9	CTAF 122.9 0
----------------------------	---	------------------------

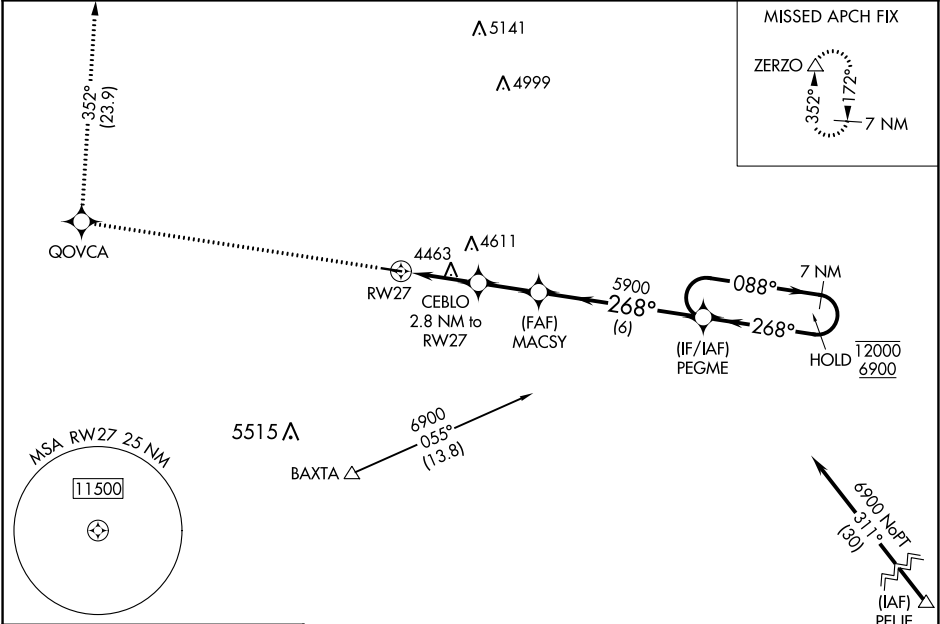

ELEV 4312	TDZE 4295	9600	QOVCA	tr 352°	ZERZO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).
		*LNAV only		CEBLO 2.8 NM to RWY 27	MACSY	PEGME 7 NM Holding Pattern
		RWY 27		5200*	5900	088° → 12000 ← 268° 6900
		268° to RWY 27		2.8 NM	2.2 NM	6 NM
		4200 X 60		GP 3.00° TCH 51		
		1.2% UP				
		MIRL Rwy 9-27 0				
		CATEGORY		A		B
		LPV DA#		4606-1		311 (300-1)
		LPV DA		4950-1 7/8		655 (700-1 7/8)
		LNAV/VNAV DA		4999-2		704 (700-2)
		LNAV MDA		5140-1		5140-1 1/4
				845 (900-1)		845 (900-1 1/4)
		CIRCLING		5140-1 1/4		828 (900-1 1/4)

NW-1, 22 FEB 2024 to 21 MAR 2024

NW-1, 22 FEB 2024 to 21 MAR 2024



WAAS CH 99443 W09A	APP CRS 088°	Rwy Idg 4200 TDZE 4312 Apt Elev 4312
--	------------------------	---

RNAV (GPS) RWY 9


WHEATLAND COUNTY AT HARLOWTON (HWQ)

RNP APCH.	MISSED APPROACH: Climb to 8000 direct FALKI and on track 114° to TASSE and hold.
▼ NA Rwy 9 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. Use Lewistown altimeter setting. Straight-in Rwy 9 NA at night, Circling Rwy 9 NA at night.	

LWT ASOS 118.375	SALT LAKE CENTER 127.75 351.9	CTAF 122.90
----------------------------	---	-----------------------

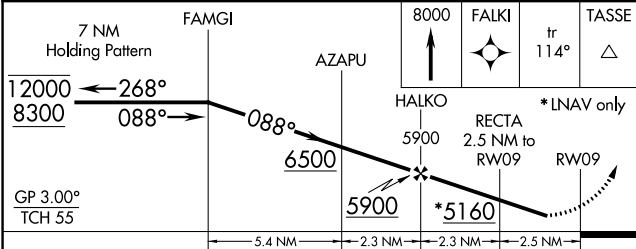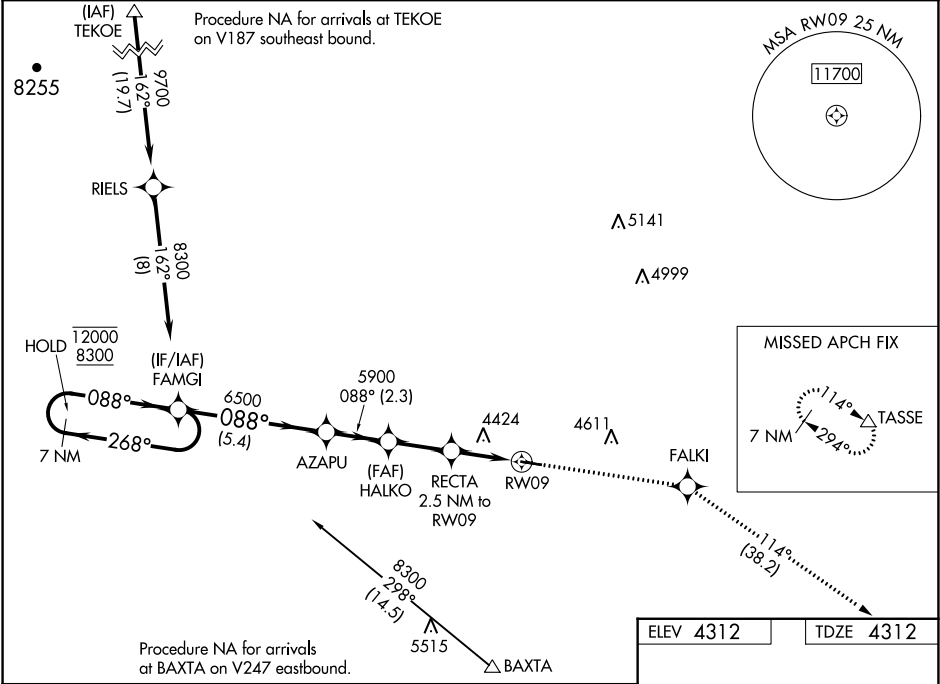

CATEGORY	A	B	C	D
LPV DA	4673-1	361 (400-1)		NA
RNAV/VNAV DA	4673-1	361 (400-1)		NA
RNAV MDA	4800-1	488 (500-1)		NA
CIRCLING	4940-1 628 (700-1)	5000-1 688 (700-1)		NA

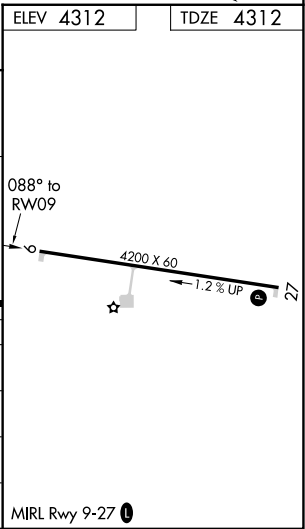

NW-1, 22 FEB 2024 to 21 MAR 2024

NW-1, 22 FEB 2024 to 21 MAR 2024