

WAAS CH 56213 W24A	APP CRS 244°	Rwy Idg TDZE Apt Elev	5130 817 823
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24
MEXICO MEML (MYJ)


NA

Helicopter visibility reduction below ¾ SM NA. Inoperative table does not apply.
DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Columbia Rgnl altimeter setting; increase LPV DA to 1200 feet; increase LNAV/VNAV DA to 1352 feet; increase all MDAs 80 feet and Circling visibility Cat C ½ SM. Baro-VNAV NA when using Columbia Rgnl altimeter setting.

MALS

MISSED APPROACH:
Climb to 3000 direct TABCO and hold.

AWOS-3PT 120.575	MIZZU APP CON 124.375	CTAF 122.9 0
----------------------------	---------------------------------	------------------------

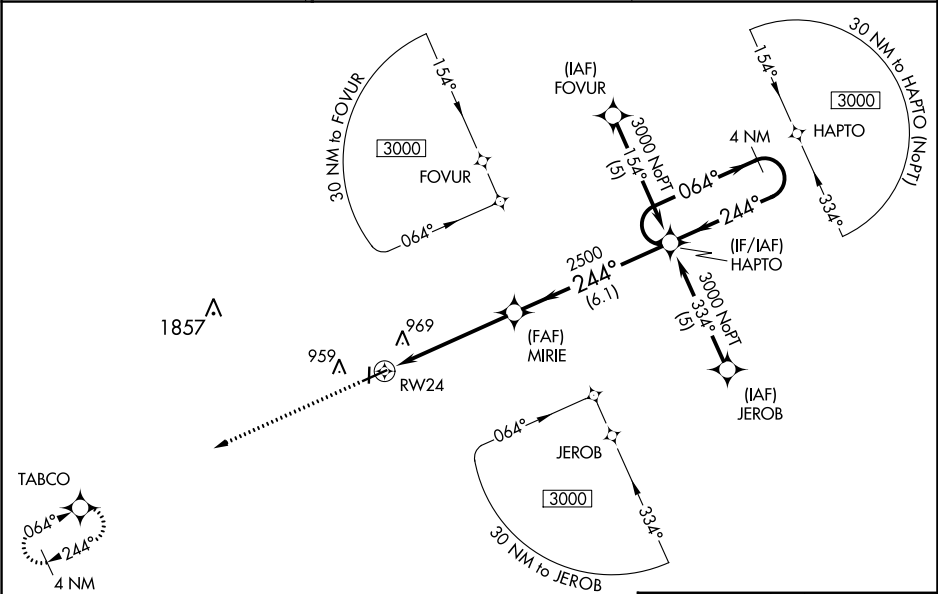

3000 **TABCO**

MIRIE **HAPTO**

4 NM Holding Pattern

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA	1126-1	309 (400-1)		NA
LNAV/VNAV DA	1278-1¾	461 (500-1¾)		NA
LNAV MDA	1220-1	403 (400-1)	1220-1¼ 403 (400-1¼)	NA
CIRCLING	1280-1	457 (500-1)	1420-1½ 597 (600-1½)	NA

REIL Rwy 18 0

MRL Rwy 6-24 and 18-36 0

WAAS CH 97423 W06A	APP CRS 064°	Rwy Idg TDZE Apt Elev	5301 822 823
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

MEXICO MEML (MYJ)

RNP APCH - GPS.


▼

▲ NA

Baro-VNAV and VDP NA when using Columbia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Columbia altimeter setting: increase LPV DA to 1146 feet and visibilities ¼ SM; increase LNAV/VNAV DA to 1167 feet and visibilities ⅓ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅓ SM and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct HAPTO and hold.

AWOS-3PT 120.575	MIZZU APP CON 124.375	CTAF 122.9 0
----------------------------	---------------------------------	------------------------

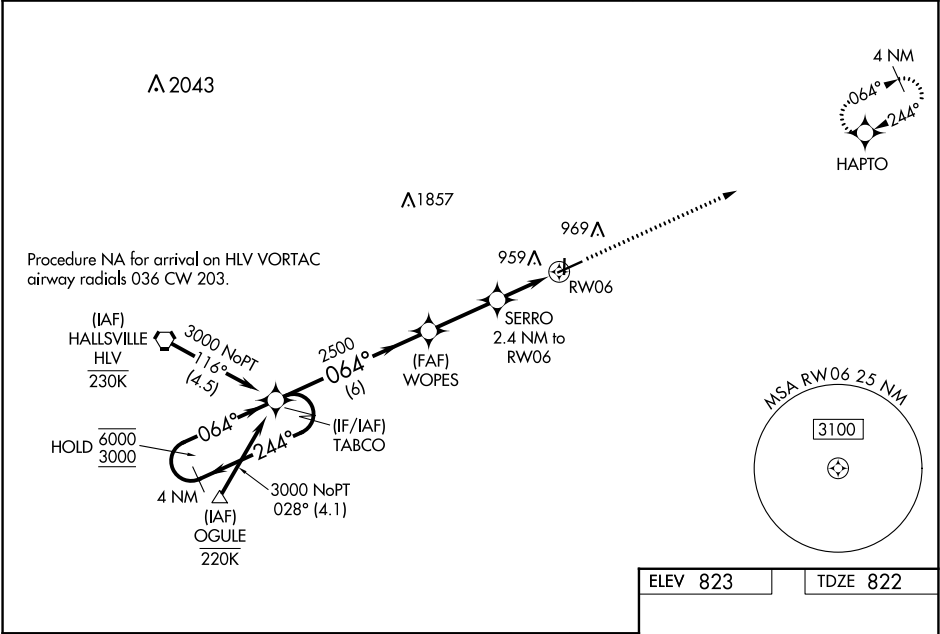

4 NM Holding Pattern

TABCO

WOPES

SERRO 2.4 NM to RW06

1.1 NM to RW06

RW06

3000

HAPTO

GP 3.00°

TCH 40

6000

3000

244°

064°

2500

1640

6 NM

2.7 NM

1.4 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	1072-¾	250 (300-¾)		NA
LNAV/VNAV DA	1093-⅞	271 (300-⅞)		NA
LNAV MDA	1200-1	378 (400-1)		NA
CIRCLING	1280-1	457 (500-1)	1420-1½ 597 (600-1½)	NA

ELEV 823

TDZE 822

8 L

3200 X 50

36

064°

5501 X 100


0.3% UP

REIL Rwy 18 0

MIRL Rwy 6-24 and 18-36 0

VOR/DME RWY 24
MEXICO MEML (MYJ)

AWOS-3PT 120.575	MIZZU APP CON 124.375	CTAF 122.9 0
----------------------------	---------------------------------	------------------------



2300 HLV R-073 BOCOS HLV 19.8 BOCOS HLV 19.8 Remain within 10 NM 073° 253° 2300 2300 253° 3.00° TCH 40° 4.6 NM					
CATEGORY	A		B	C	D
S-24	1220-1 403 (400-1)		1220-1¼ 403 (400-1¼)	NA	
CIRCLING	1280-1 457 (500-1)		1420-1½ 597 (600-1½)	NA	

NC-3, 22 FEB 2024 to 21 MAR 2024