



**TOP ALTITUDE:  
ASSIGNED AT ATC**

**TAKEOFF MINIMUMS:**

Rwy 1: Standard.  
Rwy 19: Standard with minimum climb  
of 234' per NM to 1500.

ATIS 125.325 270.1  
CLNC DEL 128.3 275.8  
GND CON 128.3 275.8  
SELFRIIDGE TOWER \* 120.15 225.4  
SELFRIIDGE DEP CON 119.6 391.9

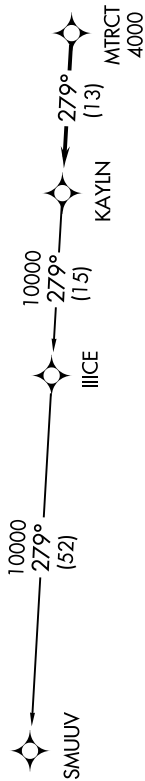

NOTE: RNAV 1.  
NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: Turbojet departures at/above 10000,  
maintain 280K until advised by ATC.

NOTE: Chart not to scale.

**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RUNWAY 1:** Climb on heading 007° or as assigned for RADAR vectors to cross MTRCT at or above 4000, thence....  
**TAKEOFF RUNWAY 19:** Climb on heading 187° or as assigned for RADAR vectors to cross MTRCT at or above 4000, thence....

....on track 279° to KAYLN, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

**SMUUV TRANSITION (KAYLN2.SMUUV):**