



WAAS CH 58006 W12A	APP CRS 121°	Rwy Idg 7504 TDZE 402 Apt Elev 410
--	------------------------	---

RNAV (GPS) Y RWY 12
TRI-CITIES (PSC)

T Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting: increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibilities $\frac{1}{8}$ mile; LNAV/VNAV all Cats visibilities $\frac{3}{8}$ mile; increase LNAV and Circling Cats C and D visibility $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 900 then
climbing left turn to
3200 direct CITYS
and hold.

ATIS 125.65	SPOKANE APP CON ★ 128.75 377.2	TRI-CITIES TOWER ★ 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
----------------	-----------------------------------	--	------------------	-------------------	------------------

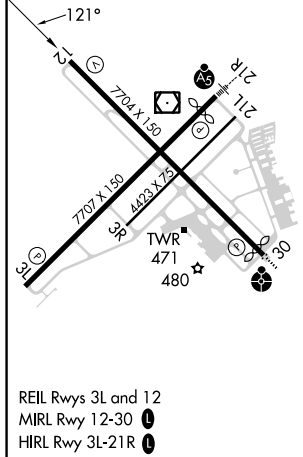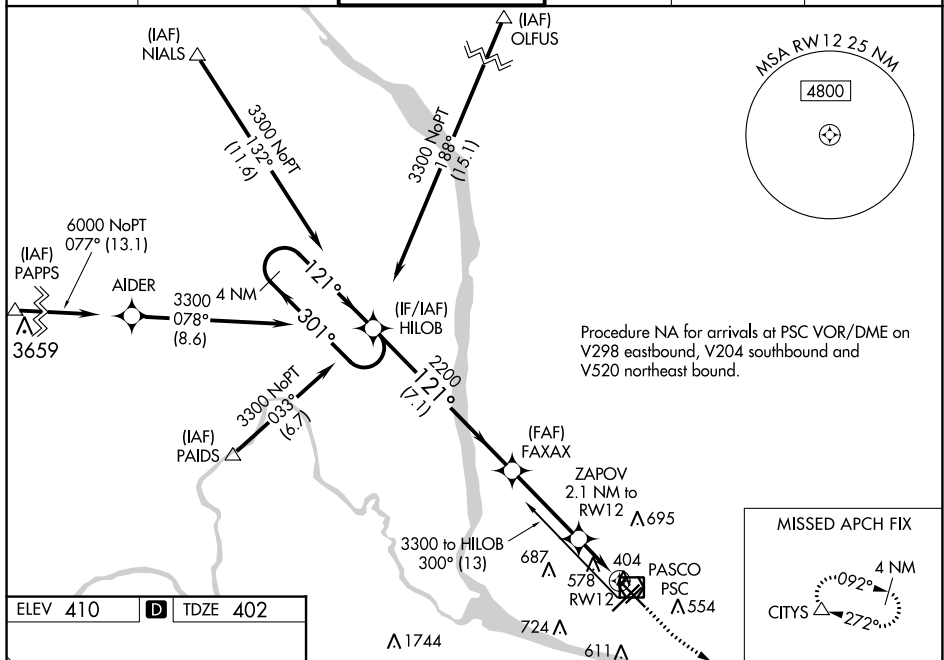

CATEGORY	A	B	C	D
LPV DA		602- ³ / ₄	200 (200- ³ / ₄)	
LNAV/VNAV DA		755-1 ¹ / ₈	353 (400-1 ¹ / ₈)	
LNAV MDA	840-1	438 (500-1)	840-1 ³ / ₈	438 (500-1 ³ / ₈)
C CIRCLING	880-1 470 (500-1)	940-1 530 (600-1)	1040-1 ³ / ₄ 630 (700-1 ³ / ₄)	1100-2 ¹ / ₄ 690 (700-2 ¹ / ₄)