
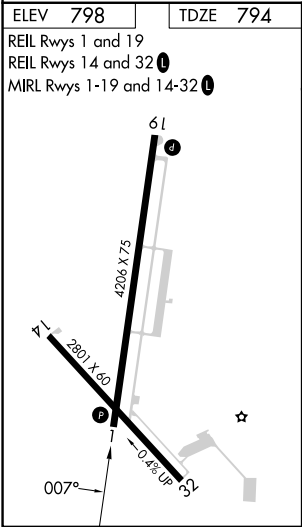


WAAS CH 65903 W01A	APP CRS 007°	Rwy Idg 4206 TDZE 794 Apt Elev 798
--	------------------------	---

RNAV (GPS) RWY 1
SKYHAVEN (RCM)

RNP APCH - GPS.	⚠ Circling Rwy 32 NA at night. Baro-VNAV NA when using Whiteman AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Knob Noster altimeter setting and increase LPV DA to 1083 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1194 feet and all visibilities ½ SM. Increase all MDAs 40 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ½ SM.	MISSED APPROACH: Climb to 3000 direct FALIS and hold.
-----------------	--	---

AWOS-3PT 119.575	WHITEMAN APP CON ★ 127.45 284.0	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------------

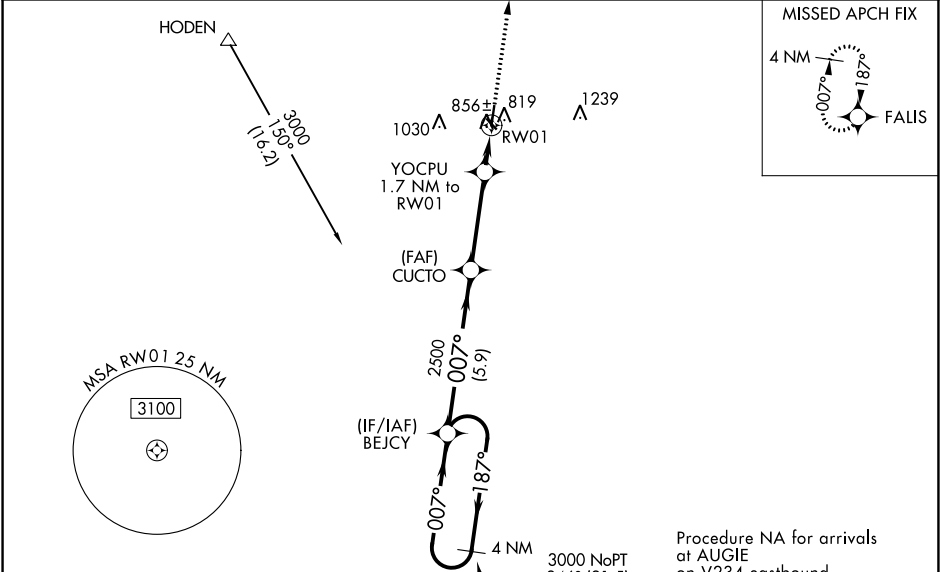

ELEV 798 TDZE 794		REIL Rwy 1 and 19 REIL Rwy 14 and 32 MIRL Rwy 1-19 and 14-32	
4 NM Holding Pattern		GP 3.00° TCH 36	
3000 ← 187°		007° →	
2500		*1360	
5.9 NM		3.6 NM	
CATEGORY		A B C D	
LPV DA		1044-1 250 (300-1)	
LNAV/ VNAV DA		1155-1¼ 361 (400-1¼)	
LNAV MDA		1220-1 426 (500-1)	
CIRCLING		1260-1 462 (500-1)	
		1340-1 542 (600-1)	
		1380-1½ 582 (600-1½)	