


WAAS CH 87021 W24A	APP CRS 244°	Rwy Idg TDZE 534 Apt Elev 618	7603
--	------------------------	---	-------------

RNAV (GPS) RWY 24

ST LOUIS LAMBERT INTL (STL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Rwy 24 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to 1% and LNAV Cats C, D and E visibility to 1% .				MALS 	MISSED APPROACH: Climb to 3000 direct SORUE and on track 294° to AUGST and hold.	
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1	CPDLC

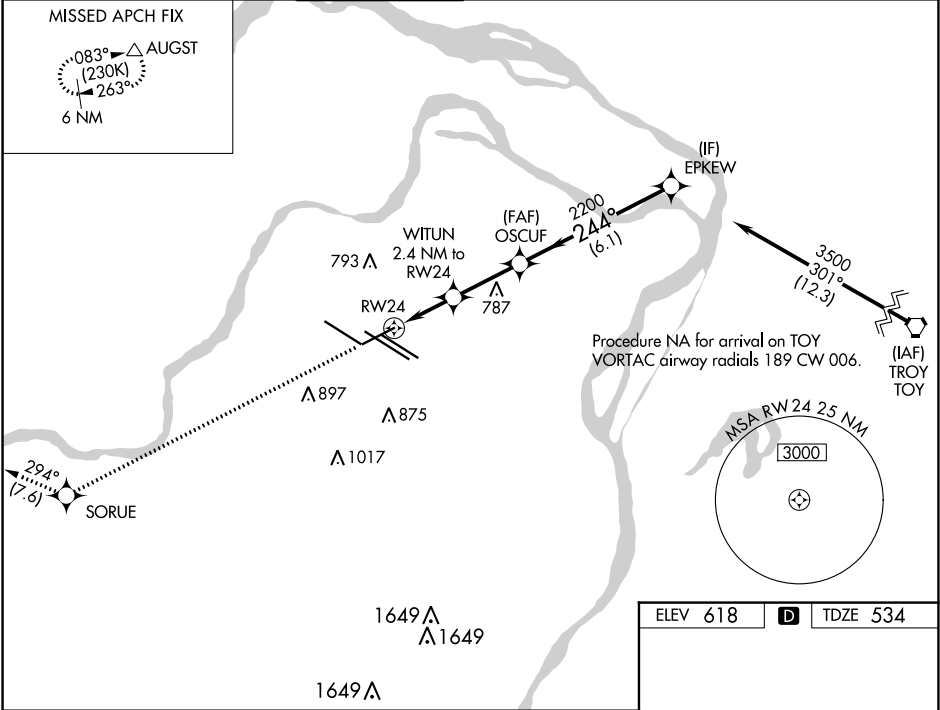

3000 ↑	SORUE ✱	tr 294° △	EPKEW			
* LNAV only						
RW24 ↙		* 1.6 NM to RW24 ↓	WITUN 2.4 NM to RW24	OSCUF 2200	3500	
1340*			2200		GP 3.00° TCH 50	
1.6 NM			0.8 NM	2.7 NM	6.1 NM	
CATEGORY	A	B	C	D	E	
LPV DA	734/40		200 (200-¾)			
LNAV/VNAV DA	931/50		397 (400-1)			
LNAV MDA	1080/40 546 (500-¾)		1080-1⅔ 546 (500-1⅔)			

